XINHONG GROUP LIMITED

Heat Transfer Press Machine Featured Supplier





All our products are certified by the authority of SGS and meet CE standards





Product Center









XINHONG GROUP LIMTED

Factory Address: Baijin Industrial Zone, Baizhang Town, Minqing County, Fuzhou City, Fujian Province, China Office Address: 923-932#, 9/F., La Cite Block 40, No. 1-1 High-tech Avenue, High-tech Zone, Fuzhou City, Fujian Province, China

Phone: 86-0591-83952222 Fax: 86-0591-83805930

Website: www.xheatpress.com Email: sales@xheatpress.com



ABOUT US

Established in 2002, Xinhong Group reorganized and expanded business in 2011, and has acquired quality management system certification of ISO9001, ISO14000, SGS and CE product labels. Heat transfer press machine is core product line for Xinhong Group, our team are offering an extensive range of equipment, accessories and innovative process solutions that are based on advanced technology and a real knowledge of the heat transfer press industry. Our team have designed and delivered the most reliable, efficient, innovative, and cost-effective solutions for the process and overall hobby craft, advertising, promotion and fashion design, etc.











Contents.

Which EasyTrans Heat Press?01-02
Control System03-04
EasyTrans Basic Level05-18
EasyTrans Ultimate Level
EasyTrans Premium Level41-44
EasyTrans Cap Mate45-48
EasyTrans Mug Mate49-52
EasyTrans Accessories53-54



PRODUCTION FLOW

Focus on Heat Press Manufacturing Since 2002



Machining

Machining include laser cutting, bending, drilling to make basic heat press framework.



Assembly

Assembly to set up the whole heat press by framwork and electrical components to make a heat press real working.



Welding & Polishing

Welding & polishing to set up a heat press framework and to make the welded joints polished.



Quality Control

Ensure each heat press is well-quality before packing by filtering out unqualified heat presses.



Rust Cleaning & Phosphatizing

Rust cleaning is to remove the rust by acid liquid, phosphatizing is to add protective finish on metal to anti the feature rusting.



Powder Spraying

Power spraying is process to paint the frameworks in customers preferable colors.



Packaging

We use suitable packaging materials like styrofoam, polyfoam, paper carton and wooden boxes to make sure shipping safety.



Shipping

The heat presses will be shipped by the confirmed shipping method after everything is completed.







EasyTrans™ heat transfer presses are engineered to imprint a design or graphic on a substrates, such as a t-shirt, cap and mugs, etc. With the application of heat and pressure for a preset period of time, you can make the heat transfer items lasting long on the substrates.

With so many options to choose from, you must be a bit Confused which would be the proper heat press machine for you.

Which Size?

Regarding the output size, make sure the chosen heat platen is larger than the paper or vinyl design or graphics.

US Letter (216 x 279mm) (8.5" x 11")	A4 (210 x 297mm) (8.3" x 11.7")	
Tabloid	A3	A2
(279 x 432mm)	(297 x 420mm)	(420 x 594mm)
(17" x 11")	(11.7" x 16.5")	(16.5" x 23.4")

Temp. & Time & Pressure & Operation




Accurate Temp.

Controlled & Reading



Accurate Timing

Countdown



Even Distribution &
Sufficient Pressure



Correct Operation
(Cold or Hot Peel)

Which Heat Press Features?







Swing-away



Slide Drawer



Semi Auto-open



Over-The-Center-Pressure



Changeable



Threadable



Pneumatic



Electronic



Twin Station

- ▶ Clamshell: Save space and cost friendly
- ▶ Slide Drawer: Slide base for heat-free workplace
 - vorkplace **Semi Auto-open**: Save labor and more efficient
- ▶ OTC Pressure: Even & larger pressure distribution
- ► Changeable: Make multifunctional jobs realized

▶ **Swing-away**: Rotation for heat-free workplace

- ▶ Thread-able: Avoid the back side from the heat
- ▶ **Pneumatic**: Hands-free and efficient
- ▶ **Electric**: Hands-free, efficient and quiet
- ▶ **Twin Station**: Working efficient & save labor



Control System


WHAT DOES AUTO POWER-OFF DO?
























: Set Mode





: Temperature Digits



Decrease Digits
: (Long hold for temperature calibration)





Control Panel Display



P-1: Temp. Setting Mode
Touch SET & ↑↓ buttons to set
desired Temp.



P-2 : Time Setting Mode Touch SET & $\uparrow \downarrow$ buttons to set desired time.



P-3: $^{\circ}$ C or $^{\circ}$ F Read-out Touch SET & $^{\uparrow}$ $^{\downarrow}$ buttons to set $^{\circ}$ C or $^{\circ}$ F



P-3 : ${}^{\mbox{$\bf C$}}$ or ${}^{\mbox{$\bf F$}}$ Read-out Touch SET & ${}^{\mbox{$\bf A$}} \downarrow$ buttons to set ${}^{\mbox{$\bf C$}}$ or ${}^{\mbox{$\bf F$}}$



P-4 : Auto Power-off Mode Touch SET & ↑↓ buttons to set auto-off time Max 120mins stand-by



Auto-off Introduction
It reads OFF and machine starts
to cool down after machine
raises to SET temp. and remains
no operation for P-4 set time.
Operation like control panel
setting or heat pressing.



Wake Machine from stand-by You can wake up the heat press from sleepy mode by touching any button on the control panel, and machine starts to heat again.




Clear Counter NO.
You can long hold the CLEAR button
to clear the COUNTER NO. on the panel.







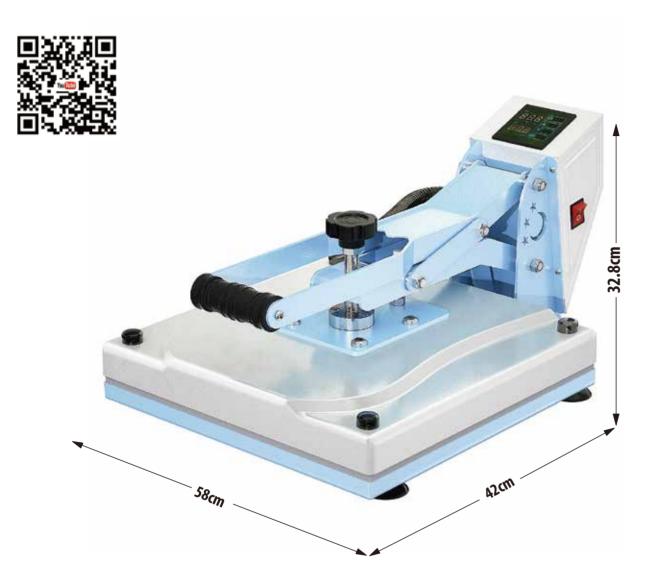

This Industrial–quality clamshell heat press adopts the latest heating technology and patent pending lower platen to improve the transfer performance. From the capacity, with the new technological platen, it not only gains a higher quality of transfer, but also gains a quite good look and less possibility to get hurt by the old type of cover for the platen. The stability has also been enhanced with a high precision temperature sensor and accurate time controller, widely used for home decorations, customized gifts, and holiday celebrations.









▼ Technical Parameters

Model	HP3808-N
Voltage	110V/220V
Heat Plate	38 x 38cm
Power	1000W
Controller	Digital Controller
Max. Temperature	232 °C/ 450 °F
Temp. Accuracy	±4°F/2°C
Max. Pressing Force	300KG
Working Style	Lever Mechanism
Stand-by Feature	N/A
Accept Thickness	0.8cm
Dimensions (L x W x H)	58.0 x 42.0 x 32.8cm
Packaging (L x W x H)	62.0 x 44.0 x 37.0cm
Product Weight	17.0kg
Shipping Weight	20.0kg



☐ Upgraded Teflon Coating

This Teflon-covered heat press is capable of decreasing the possibility of scorching during the transfers. Besides, it's easy to clean and can make printing more steady. A ground wire is also equipped for secure operation.



Precise Control

A high-precision temp sensor features a stronger sensitivity. Controller automatically beep or shut off when the transfer is done, reducing the possibility of overheating. Every detail is so thoughtful, and no need to worry about injuries.



Tightly Wrapped

Adjustable pressure knobs, fitted-to-palm handle, and quality silicon heating pads provide a full range of heating effects. Multiple designs helps the mats tightly wrap the materials.

Especially suitable for the transfer of flat items.



→ Perfectly Even Pressure

With its patent pending lower platen which is approximate 100% perfectly straight/leveled, put it under the good quality silicone mat to achieve a better pressure balance and greater transfer performance.








This auto open with slide-out base heat press machine is excellent for transfer printing, it come with Fashionable design & Sturdy made, most of important, can easily meet customers' different requirements. Its slide out under base ensures user to load garments and place transfers in a breeze. Designed for all heat press applications including: T-shirts, frames, slippers and other flat products. This auto open heat press machine is perfect choice for small advanced business and applicable for whatever kinds of the heat transfers incl. no cutting laser transfer paper.









▼ Technical Parameters

Model	MATE380
Voltage	110V/220V
Heat Plate	38 x 38cm, 40 x 50cm
Power	1000W, 2000W
Controller	LCD Controller
Max. Temperature	232 °C/ 450 °F
Temp. Accuracy	±4°F/2°C
Max. Pressing Force	300KG
Working Style	Lever Mechanism & Magnetic
Stand-by Feature	Max.120mins
Accept Thickness	0.8cm
Dimensions (L x W x H)	53.5 x 38.5 x 28.5cm
Packaging (L x W x H)	58.0 x 42.0 x 33.5cm
Product Weight	18.0kg
Shipping Weight	22.5kg
Certificate	CE,UKCA




→ Precise Control

A high-precision temp sensor features a stronger sensitivity. Controller automatically beep or shut off when the transfer is done, reducing the possibility of overheating. Every detail is so thoughtful, and no need to worry about injuries.



¬ ■ Slide-out Drawer

This heat press includes a pull-out drawer and leaves a large heat-free area, which will be great convenient for the user when loading a garment and safety well guarantee for the burnt dangers.



→ Perfectly Even Pressure

With its patent pending lower platen which is approximate 100% perfectly straight/leveled, put it under the good quality silicone mat to achieve a better pressure balance and greater transfer performance.




→ Tightly Wrapped

OCT refers to Over-The-Center pressure adjust structure which helps to generate larger and even pressure. So the heat press can better guarantee for those need higher pressure like trim-free laser transfer paper.



EasyTrans Basic Level



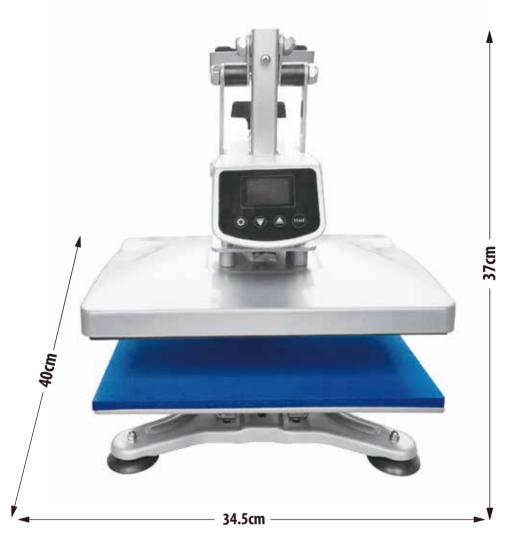

Upgraded Model with characteristic of portable weight and swing away design, the size of 23x30cm Manual Heat Press (SKU#HP230B-4) offers a modern LCD controller, simplified display screen, makes it easier for customer to operate and read-out, besides, advanced & sturdy base seat and pressure structure extend the lifetime of machine, blue silicone mat match with a silver grey machine body makes it looks more industrialize.









▼ Technical Parameters

Model	HP230B-4
Voltage	110V/220V
Heat Plate	23 x 30cm
Power	900W
Controller	LCD Controller
Max. Temperature	232 °C/ 450 °F
Temp. Accuracy	±4°F/2°C
Max. Pressing Force	350kg
Working Style	Lever Mechanism
Stand-by Feature	Max. 120 mins
Accept Thickness	≤2.5cm
Dimensions (L x W x H)	40 x 34.5 x 37cm
Packaging (L x W x H)	46 x 37.5 x 40cm
Product Weight	14kg
Shipping Weight	15kg
Certificate	CE,UKCA



¬ 2IN1 Features

HP230B-4 is actually 2IN1 featured A4 craft heat press for family or sign starter. With the quick plug (Pls reminder us if you need 2IN1 feature option), regardless of it works as a T-shirts heat press, it also can apply for the coffee mug printing with the MugMate attachment.



¬ ● Advanced LCD Controller

This craft heat press is also equipped with advanced LCD controller DL5000 series, super precise in Temp control and read-out, also super precise timing countdowns like an clock. The controller also featured with Max. 120mins stand-by function (P-4 mode) make it energy saving and safety.



¬ • Lever Mechanism Locking Structure

This Craft heat press generates the heaviest force in Craft Pro Family (Max. 350kg). This heat press size in A4 (23 x 30cm) and works for it meet the major heat transfer Incl. sublimation paper, HTV or heat transfer paper, also no cut laser transfer paper like Forever, NeeNah, MTC and AT&T, etc.








Featured Processing Standard

Heat transfer presses are produced by ISO9001 qualified team, UL/CE certified spare parts and advanced mold or facilities are applied to make sure the premium quality both in electronic & mechanism stability and heat transfer projects in good quality.









New advanced Combo Multipurpose swing away Heat

Press Machine (SKU#HP8INI-4) success of the Digital

Combo lies in its Instantly interchangeable system of

Heat Platens and Bottom Tables, with a new modern LCD

controller, simplified display screen, makes it easier for

customer to operate and read-out, besides, advanced &

sturdy base seat and pressure structure extend the

lifetime of machine, blue silicone mat match with a silver

grey machine body makes it looks more industrialize.

Available size: 38x38cm.









▼ Technical Parameters

M. I.I.	LIBORY A
Model	HP8IN1-4
Voltage	110V/220V
Heat Plate	38 x 38cm
Power	300W-1000W
Controller	LCD Controller
Max. Temperature	232 °C/ 450 °F
Temp. Accuracy	±4°F/2°C
Max. Pressing Force	350kg
Working Style	Lever Mechanism
Stand-by Feature	Max. 120 mins
Accept Thickness	≤2.5cm
Dimensions (L x W x H)	56 x 46 x 46cm (38x38cm)
Packaging (L x W x H)	62 x 52 x 52cm (38x38cm)
Product Weight	27kg
Shipping Weight	30kg
Certificate	CE,UKCA



Multifunctional Purpose

This is a multifunctional purpose heat press, it can be a combo machine from 2INI to 15INI with different attachment, the available accessories incl. T-shirt platen, plate attachments, cap attachment, different size mug attachments, label attachment, badge attachment and so on.



Advanced LCD Controller

This heat press is also equipped with advanced LCD controller DL5000 series, super precise in Temp control and read-out, also super precise timing countdowns like an clock. The controller also featured with Max. 120mins stand-by function (P-4 mode) make it energy saving and safety.



Premium Quality Heat Plate

Die casting heating element made by reasonable layout heating tubes and 6061 qualified aluminum, Say. 8 pieces heat tubes for 38 x 38cm heat plate. Make sure even heat and pressure distribution, with the premium quality of the lower aluminum plate, all together guaranteed the good transfer job.









Featured Processing Standard

Heat transfer presses are produced by ISO9001 qualified team, UL/CE certified spare parts and advanced mold or facilities are applied to make sure the premium quality both in electronic & mechanism stability and heat transfer projects in good quality.







Upgraded Model with pneumatic type pressure setting and Manual/Auto working mode switch function, the size of 40x60cm Pneumatic Double Station Heat Press (SKU#B2-3) offers a modern LCD controller, simplified display screen, makes it easier for customer to operate and read-out, besides, advanced & sturdy base seat and pressure structure extend the lifetime of machine, with the enlarged format working plates, it is a good choice for clothing customization manufacturer.









▼ Technical Parameters

Model B2-3 Voltage 110V/220V Heat Plate 40 x 60cm Power 2000W-2400W Controller LCD Controller Max. Temperature 232 °C/ 450 °F Temp. Accuracy ±4 °F/2 °C Max. Pressing Force 460kg Working Style Air Piston Stand-by Feature Max. 120 mins Accept Thickness ≤4.5cm Dimensions (L x W x H) 95 x 82 x 55cm Packaging (L x W x H) 107 x 94 x 67cm Product Weight 110kg Shipping Weight 120kg Certificate CE,UKCA		
Heat Plate Power Power Controller LCD Controller Max. Temperature 232 °C/450 °F Temp. Accuracy Max. Pressing Force 460kg Working Style Air Piston Stand-by Feature Accept Thickness Dimensions (L x W x H) Packaging (L x W x H) Product Weight Shipping Weight 40 x 60cm 40 x 60cm Max. 120 controller 232 °C/450 °F 460kg Air Piston Max. 120 mins 44.5cm 110 x 95 x 82 x 55cm Packaging (L x W x H) 110 kg Shipping Weight	Model	B2-3
Power Controller LCD Controller Max. Temperature 232 °C/ 450 °F Temp. Accuracy ±4 °F/2 °C Max. Pressing Force 460kg Working Style Air Piston Stand-by Feature Max. 120 mins Accept Thickness Dimensions (L x W x H) Packaging (L x W x H) Product Weight Shipping Weight 120kg	Voltage	110V/220V
Controller LCD Controller Max. Temperature 232 °C/450 °F Temp. Accuracy ±4 °F/2 °C Max. Pressing Force 460kg Working Style Air Piston Stand-by Feature Max. 120 mins Accept Thickness ≤4.5cm Dimensions (L x W x H) 95 x 82 x 55cm Packaging (L x W x H) 107 x 94 x 67cm Product Weight 110kg Shipping Weight 120kg	Heat Plate	40 x 60cm
Max. Temperature232 °C/450 °FTemp. Accuracy±4 °F/2 °CMax. Pressing Force460kgWorking StyleAir PistonStand-by FeatureMax. 120 minsAccept Thickness≤4.5cmDimensions (L x W x H)95 x 82 x 55cmPackaging (L x W x H)107 x 94 x 67cmProduct Weight110kgShipping Weight120kg	Power	2000W-2400W
Temp. Accuracy #40°F/2°C Max. Pressing Force Working Style Air Piston Stand-by Feature Max. 120 mins Accept Thickness Dimensions (L x W x H) Packaging (L x W x H) Product Weight Shipping Weight #400kg	Controller	LCD Controller
Max. Pressing Force460kgWorking StyleAir PistonStand-by FeatureMax. 120 minsAccept Thickness≤4.5cmDimensions (L x W x H)95 x 82 x 55cmPackaging (L x W x H)107 x 94 x 67cmProduct Weight110kgShipping Weight120kg	Max. Temperature	232 °C/ 450 °F
Working Style Stand-by Feature Max. 120 mins Accept Thickness Stand-by Feature Max. 120 mins 4.5cm Dimensions (L x W x H) 95 x 82 x 55cm Packaging (L x W x H) 107 x 94 x 67cm Product Weight 110kg Shipping Weight 120kg	Temp. Accuracy	±4°F/2°C
Stand-by FeatureMax. 120 minsAccept Thickness≤4.5cmDimensions (L x W x H)95 x 82 x 55cmPackaging (L x W x H)107 x 94 x 67cmProduct Weight110kgShipping Weight120kg	Max. Pressing Force	460kg
Accept Thickness Simensions (L x W x H) Packaging (L x W x H) Product Weight Shipping Weight \$\leq 4.5 cm\$ \$\leq 4.5 cm\$ \$\leq 4.5 cm\$ \$\leq 107 \times 95 \times 82 \times 55 cm\$ \$\leq 107 \times 94 \times 67 cm\$ \$\leq 110 kg\$ \$\leq 120 kg\$	Working Style	Air Piston
Dimensions (L x W x H) Packaging (L x W x H) Product Weight Shipping Weight 120kg	Stand-by Feature	Max. 120 mins
Packaging (L x W x H) Product Weight 110kg Shipping Weight 120kg	Accept Thickness	≤4.5cm
Product Weight 110kg Shipping Weight 120kg	Dimensions (L x W x H)	95 x 82 x 55cm
Shipping Weight 120kg	Packaging (L x W x H)	107 x 94 x 67cm
	Product Weight	110kg
Certificate CE,UKCA	Shipping Weight	120kg
,	Certificate	CE,UKCA



Air Piston Generated

This is a EasyTrans Advanced Level heat press featured with air cylinder, that can generate over 460kg down force and accept Max. 4.5cm thick object. This heat press is a good choice for any professional use for bulk production like T-shirt or shopping bag printing process.



☐ ● Manual / Auto Working Mode

M/A working mode provides customer different choices to choose, to make sure which is most suitable and efficient way to operates for different transfer jobs. It can save time under auto mode when do the bulk transfer works. And customer can be freestyle when it is under manual mode.



Larger Working Area

Double station and enlarged working plate can meet most of the clothing manufacturer to do different kinds of the transfer, and sublimation blanks. And it is widely used at textile and clothing manufacturing industry.



Advanced LCD Controller

This heat press is also equipped with advanced LCD controller DL5600 series, super precise in Temp control and read-out, also super precise timing countdowns like an clock. The controller also featured with Max. 120mins stand-by function (P-4 mode) make it energy saving and safety.



EasyTrans Basic Level



Upgraded Model with electric type pressure setting and Manual/Auto working mode switch function, the size of 40x60cm Electric Double Station Heat Press (SKU#B2-4) offers a modern LCD controller, simplified display screen, makes it easier for customer to operate and read-out, besides, advanced & sturdy base seat and pressure structure extend the lifetime of machine, with the enlarged format working plates, it is a good choice for clothing customization manufacturer.









▼ Technical Parameters

	20.4
Model	B2-4
Voltage	110V/220V
Heat Plate	40 x 60cm
Power	2000W-2400W
Controller	LCD Controller V2
Max. Temperature	232 °C/ 450 °F
Temp. Accuracy	±4 °F / 2 °C
Max. Pressing Force	350kg
Working Style	Electronic Motor
Stand-by Feature	Max. 120 mins
Accept Thickness	≤4.5cm
Dimensions (L x W x H)	95 x 82 x 55cm
Packaging (L x W x H)	107 x 94 x 67cm
Product Weight	114kg
Shipping Weight	124kg
Certificate	CE,UKCA

¬ ■ Electric Auto Up&Down



Air free, Generate a pressure maximum to be 350Kg, and provides a quiet surrounding for customers. Besides, the electric automatic version helps the customer save a lot of energy, get rid of from the lever mechanism design, easy trans, easy life.



■ Manual / Auto Working Mode

M/A working mode provides customer different choices to choose, to make sure which is most suitable and efficient way to operates for different transfer jobs. It can save time under auto mode when do the bulk transfer works. And customer can be freestyle when it is under manual mode.

☐ Larger Working Area



Double station and enlarged working plate can meet most of the clothing manufacturer to do different kinds of the transfer, and sublimation blanks. And it is widely used at textile and clothing manufacturing industry.

Advanced LCD Controller

This heat press is also equipped with advanced LCD controller DL5600 series, super precise in Temp control and read-out, also super precise timing countdowns like an clock. The controller also featured with Max. 120mins stand-by function (P-4 mode) make it energy saving and safety.



EasyTrans Basic Level



Upgraded Model with pneumatic type pressure setting and Manual/Auto working mode switch function, the size of 15x15cm Pneumatic Double Station Heat Press (SKU#B1015-2) offers a modern LCD controller, simplified display screen, makes it easier for customer to operate and read-out, besides, advanced & sturdy base seat and pressure structure extend the lifetime of machine, with the 15x15cm enlarger plate size for labels, it is a good choice for clothing customization manufacturer.









▼ Technical Parameters

Model	B1015-2
Voltage	110V/220V
Heat Plate	15 x 15cm
Power	550W-650W
Controller	LCD Controller V2
Max. Temperature	232 °C/ 450 °F
Temp. Accuracy	±4°F/2°C
Max. Pressing Force	460kg
Working Style	Air Piston
Stand-by Feature	Max. 120 mins
Accept Thickness	≤4.5cm
Dimensions (L x W x H)	58 x 50 x 45cm
Packaging (L x W x H)	70 x 62 x 57cm
Product Weight	65kg
Shipping Weight	75kg
Certificate	CE,UKCA



Air Piston Generated

This is a EasyTrans Advanced Level heat press featured with air cylinder, that can generate over 460kg down force and accept Max. 4.5cm thick object. This heat press is a good choice for any professional use for bulk production like T-shirt or shopping bag printing process.



Manual / Auto Working Mode

M/A working mode provides customer different choices to choose, to make sure which is most suitable and efficient way to operates for different transfer jobs. It can save time under auto mode when do the bulk transfer works. And customer can be freestyle when it is under manual mode.

Heat transfer presses are produced by ISO9001



→ Advanced LCD Controller

This heat press is also equipped with advanced LCD controller DL5600 series, super precise in Temp control and read-out, also super precise timing countdowns like an clock. The controller also featured with Max. 120mins stand-by function (P-4 mode) make it energy saving and safety.



ISO 900

¬ ● Featured Processing Standard



qualified team, UL/CE certified spare parts and advanced mold or facilities are applied to make sure the premium quality both in electronic & mechanism stability and heat transfer projects in good quality.









New design with a better assist slide handle, Model#:

HP3804D-F, is easier for customer to get it slide out. This
auto open machine with a slide out base is excellent for
transfer printing. It comes with a fashionable design and
sturdy body. Most important is its threadable & interchangeable functions. Designed for all heat press applications
including T shirts, frames, slippers and other flat products.
This auto open machine is perfect choice for samll
advanced business and applicable for whatever kinds of the
heat transfers incl. toner transfer paper.









▼ Technical Parameters

Model	HP3804D-F
Voltage	110V/220V
Heat Plate	38 x 38cm, 40 x 50cm
Power	1400W-2200W
Controller	LCD Controller
Max. Temperature	232 °C/ 450 °F
Temp. Accuracy	±4°F/2°C
Max. Pressing Force	360kg
Working Style	Lever Mechanism & Magnetic
Stand-by Feature	Max. 120 mins
Accept Thickness	≤1cm
Dimensions (L x W x H)	68 x 42 x 47cm
Packaging (L x W x H)	75.5x48.8x54cm
Product Weight	40kg
Shipping Weight	44kg
Certificate	CE,UKCA



¬ ■ Semi auto-open Gently

This is a EasyTrans Advanced Pro Level heat press for heat transfer users, the heat press has semi auto-open function which saves time and works more efficient. Besides, it's over-center pressure adjustment and accurate laser frame enable an even pressure and make it an Pro Level press for no cutting laser transfer paper.



Advanced LCD Controller

This heat press is also equipped with advanced LCD controller IT9000 series, super precise in Temp control and read-out, also super precise timing countdowns like an clock. The controller also featured with Max. 120mins stand-by function (P-4 mode) make it energy saving and safety.



¬ • Pull-out Drawer & Featured Base

This EasyTrans heat press is installed with a smooth pull-out drawer enable you have sufficient space to load your garment. With the featured base: 1. Quick changeable system enables you to change the accessory platen in few seconds and needs no tool. 2. The thread-able base enables you to load or rotate the garment over the lower platen.



Optional Platens

QUICK OPTIONAL PLATENS (Order Separately) need no tool to setup, they bring great convenience and offer so many possibles for different substrates.





The ultimate semi-auto heat press Model#: HP3804D-3, prevent over-application and scorching, and allowing you to focus on more than one job at once. Full extending drawer with Non-slip Patent Technology™ allow you for easy garment layout or threads. It can lock down easily with magnetic assist, causing less fatigue on wrists and shoulders. Also the multi-timer allows user to pre-set individual time settings for three steps application or for pre-heating, application and strengthen. Over 10 kinds optional interchangeable lower platens available for different application.









▼ Technical Parameters

Model	HP3804D-3
Voltage	110V/220V
Heat Plate	40 x 50
Power	1800W-2200W
Controller	LCD Controller
Max. Temperature	210°C / 410°F
Temp. Accuracy	±4°F/2°C
Max. Pressing Force	360kg
Working Style	Lever Mechanism & Magnetic
Stand-by Feature	Max. 120 mins
Accept Thickness	≤1cm
Dimensions (L x W x H)	70 x 55 x 42mm
Packaging (L x W x H)	82 x 67 x 54mm
Product Weight	44kg
Shipping Weight	56kg
Certificate	CE,UKCA



¬ ● Gentle Semi-Auto Open

With a upgrade air spring, the machine gains the characteristics of softer open, makes it looks much safer, not easy to get hurt when opening, and it extends the service life of the machine.



¬ ● Advanced LCD Controller

Easy-to read digital time, temperature display for accurate, consistent printing.

Multi-timer allows user to pre-set individual time settings for three steps application or for pre-heating, application and strengthen.



¬ ■ Non-Slip Drawer and Base

The drawer not only available on slide out but also available to thread the garments, besides of this, the full extending drawer with Non-slip Patent TechnologyTM allow you for easy garment layout or threads.



→ Optional Platens

QUICK OPTIONAL PLATENS (Order Separately) need no tool to setup, they bring great convenience and offer so many possibles for different substrates.





The heat transfer machine suitable for a wider range has been born. With the structure design of automatic pop-up, this new machine MATE450 Pro will give you a more distinctive transfer experience. The bottom plate adopts the most common size of 40X50CM. Different from the past, it adopts a more refined method and is precisely optimized. 9 major features provide users with a more extraordinary transfer experience.










▼ Technical Parameters

Model	Mate450 Pro
Voltage	110V/220V
Heat Plate	40 x 50cm
Power	1800W-2200W
Controller	LCD Controller
Max. Temperature	232 °C/ 450 °F
Temp. Accuracy	±4°F/2°C
Max. Pressing Force	≤450kg
Working Style	Lever Mechanism & Magnetic
Stand-by Feature	Max. 120 mins
Accept Thickness	≤2.4cm
Dimensions (L x W x H)	68cm x 42cm x 47cm
Packaging (L x W x H)	92 x 42 x 70cm
Product Weight	62kg
Shipping Weight	67kg
Certificate	CE,UKCA



Swing Mechanism

This EasyTrans Deluxe heat press is Featured with a swing-away function and pull-out drawer enables you have sufficient space to load your garment, maximum to be 145 degree.




Optional Platens

QUICK OPTIONAL PLATENS (Order Separately) need no tool to setup, they bring great convenience and offer so many possibles for different substrates.



☐ Upgrade Magnetic Lock


With a upgrade magnetic lock, it comes with higher pressure to make it has a stronger suction power to make it safer.



Wider Print Range

Swing away design make it has a larger print range, it can accept thickness max. to 2.4cm of the different transfer objects.



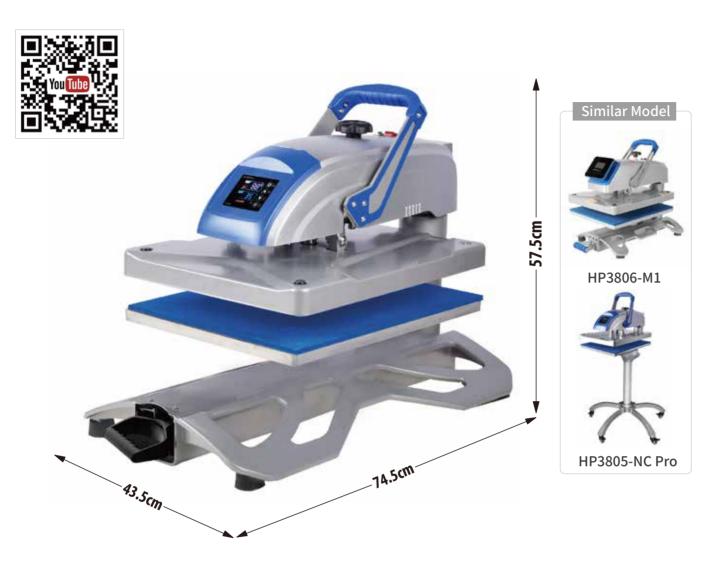

Functioning as a swinger and pull-out drawer, the 40 x 50cm Prime heat press offers a heat-free workspace, LCD screen controller, and live digital time, accurate temperature read-out and Max. 120min set automatic standby. 5pcs optional quick-change lower platens and no tools required. Full-range repeatable pressure adjustments for flurry items up to 3.5cm thick and firm items up to 1cm, also a perfect heat press for trim-free laser transfer paper. Being designed for all heat press applications including: T-shirts, frames, slippers and other flat products.









▼ Technical Parameters

Model	HP3805N		
Voltage	110V/220V		
Heat Plate	40 x 50cm		
Power	1800W-2200W		
Controller	LCD Controller		
Max. Temperature	232 °C/ 450 °F		
Temp. Accuracy	±4°F/2°C		
Max. Pressing Force	350kg		
Working Style	Lever Mechanism Locking		
Stand-by Feature	Max. 120 mins		
Accept Thickness	≤1cm		
Dimensions (L x W x H)	43.5 x 74.5 x 57.5cm		
Packaging (L x W x H)	92 x 52.5 x 60cm		
Product Weight	56.5kg		
Shipping Weight	62.5kg		
Certificate	CE,UKCA		





EasyTrans Deluxe Level heat press featured with the swing-arm and just swing-away the heating plate and leave sufficient space for loading the items. Besides, it's operated by featured lever mechanism locking system and generates Max.

350kg, refers to easy applicable for any no cut laser transfer paper. Also, the feature mechanism is very easy to lift up the handle during the operation.



Featured Pull-out Drawer

This EasyTrans Deluxe heat press is installed withfeatured pull-out drawer enables you have sufficient space to load your garment.

Additional magnetic system is applied to the drawer and make sure drawer not sliding back during the threading the T-shirt or not sliding out during press down handle.

$\ \, \blacksquare$ Thread-able & Interchangeable Base



This EasyTrans Press is installed with a featured base: 1. Quick changeable system enables you to change the different accessory platen in few seconds. 2. The thread-able base enables you to load or rotate the garment over the lower platen.



Advanced LCD Controller

This heat press is also equipped with advanced LCD controller IT9000 series, super precise in Temp control and read-out, also super precise timing countdowns like an clock. The controller also featured with Max. 120mins stand-by function (P-4 mode) make it energy saving and safety.





The twin station does twice the work with half the space as a regular swing-away press. One operator can press a job and set another in place. This helps you minimize downtime and keep up with demand, all with one heat press. Besides, LCD screen controller, and live digital time, accurate temperature read-out and Max. 120min set automatic standby. 5pcs optional quick-change lower platens and no tools required.









▼ Technical Parameters

Model	HP3805-2N		
Voltage	110V/220V		
Heat Plate	40 x 50cm		
Power	1800W-2200W		
Controller	LCD Controller		
Max. Temperature	232 °C/ 450 °F		
Temp. Accuracy	±4°F/2°C		
Max. Pressing Force	350kg		
Working Style	Lever Mechanism Locking		
Stand-by Feature	Max. 120 mins		
Accept Thickness	≤1cm		
Dimensions (L x W x H)	93 x 70 x 65cm		
Packaging (L x W x H)	110 x 82 x 70cm		
Product Weight	84.5kg		
Shipping Weight	117kg		
Certificate	CE,UKCA		



¬ • Swing-away & Even Pressure

EasyTrans Deluxe Level heat press featured with the swing-arm and just swing-away the heating plate and leave sufficient space for loading the items. Besides, it's operated by featured lever mechanism locking system and generates Max. 350kg, refers to easy applicable for any no cut laser transfer paper. Also, the feature mechanism is very easy to lift up the handle during the operation.



¬ ■ Triple Thermal Production

Two thermal protection devices connect separately with live wire and Neutral Wire, the third protection is heating plate with temperature protector which prevent abnormal temperature rise.



→ Thread-able & Interchangeable Base

This EasyTrans Press is installed with a featured base: 1. Quick changeable system enables you to change the different accessory platen in few seconds. 2. The thread-able base enables you to load or rotate the garment over the lower platen.



Advanced LCD Controller

This heat press is also equipped with advanced LCD controller IT9000 series, super precise in Temp control and read-out, also super precise timing countdowns like an clock. The controller also featured with Max. 120mins stand-by function (P-4 mode) make it energy saving and safety.







Perfect for high-volume shops, specialty decorators, and Direct-to-Garment printing, the air-powered heat press features a 40 x 50cm heated upper platen, swing motion, and slide out, for a heat-free workspace. Plus, with thread-ability design, you can position a garment once, rotate, and decorate any area. 5pcs optional quick-change lower platens and needs no tool to set up. Full-range repeatable pressure adjustments for items up to 5.5cm thick, also a perfect machine for trim-free laser transfer paper.









▼ Technical Parameters

Model	B1-N		
Voltage	110V/220V		
Heat Plate	40 x 50cm		
Power	1800W-2200W		
Controller	LCD Controller		
Max. Temperature	232 °C/ 450 °F		
Temp. Accuracy	±4°F/2°C		
Max. Pressing Force	450kg		
Working Style	Air Piston		
Stand-by Feature	Max. 120 mins		
Accept Thickness	≤5.5cm		
Dimensions (L x W x H)	43.5 x 74.5 x 51.5cm		
Packaging (L x W x H)	86.5 x 54.5 x 72.5cm		
Product Weight	66kg		
Shipping Weight	71kg		
Certificate	CE,UKCA		

Air Piston Generated



This is a EasyTrans Advanced Level heat press featured with air cylinder, that can generate over 360kg down force and accept Max. 6cm thick object. This heat press is a good choice for any professional use for bulk production like T-shirt or shopping bag printing process.



¬ • Optional Platens

QUICK OPTIONAL PLATENS (Order Separately) need no tool to setup, they bring great convenience and offer so many possibles for different substrates.

■ Thread-able & Interchangeable Base




This EasyTrans Press is installed with a featured base: 1. Quick changeable system enables you to change the different accessory platen in few seconds. 2. The thread-able base enables you to load or rotate the garment over the lower platen.

heatpress 880°C Some

Advanced LCD Controller

This heat press is also equipped with advanced LCD controller IT9000 series, super precise in Temp control and read-out, also super precise timing countdowns like an clock. The controller also featured with Max. 120mins stand-by function (P-4 mode) make it energy saving and safety.



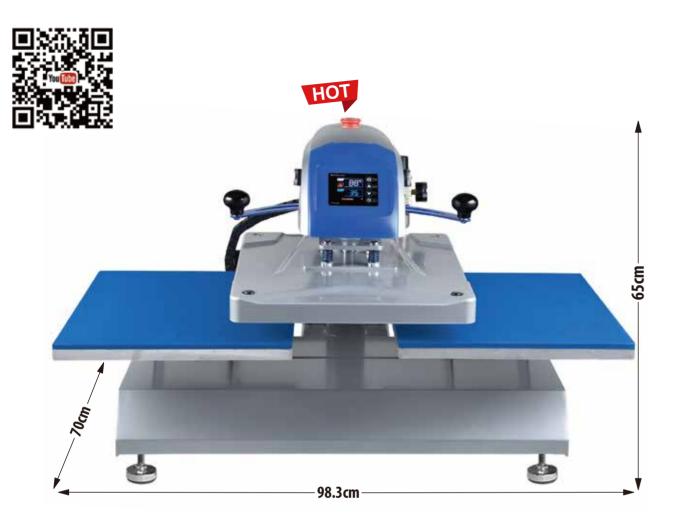

With two heat printing stations, this Air fusion heat press increases efficiency by allowing threading and layout on one station while the other is being pressed. It's perfect for high-volume operations and for DTG printing – set one station for per-treatment, the other for post-curing.

Requires air compressor (not included) with 5 gallon.









▼ Technical Parameters

Model	B1-2N		
Voltage	110V/220V		
Heat Plate	40 x 50cm		
Power	1800W-2200W		
Controller	LCD Controller		
Max. Temperature	232 °C/ 450 °F		
Temp. Accuracy	±4°F/2°C		
Max. Pressing Force	450kg		
Working Style	Electronic Motor		
Stand-by Feature	Max. 120 mins		
Accept Thickness	≤4.5cm		
Dimensions (L x W x H)	98.3 x 70 x 65cm		
Packaging (L x W x H)	110 x 81 x 87cm		
Product Weight	84.5kg		
Shipping Weight	117kg		
Certificate	CE,UKCA		

→ Air Piston Generated




This is a EasyTrans Advanced Level heat press featured with air cylinder, that can generate over 360kg down force and accept Max. 6cm thick object. This heat press is a good choice for any professional use for bulk production like T-shirt or shopping bag printing process.



¬ • Twin Station Efficient

This EasyTrans Deluxe level heat press has twin lower plates, you could shuttle the upper plate from the left and right, which makes the heat transfer work more safety and get rid of the heat zone, also makes the transfer job more

☐ ● Thread-able & Interchangeable Base



This EasyTrans Press is installed with a featured base: 1. Quick changeable system enables you to change the different accessory platen in few seconds. 2. The thread-able base enables you to load or rotate the garment over the lower platen.

888

Advanced LCD Controller

This heat press is also equipped with advanced LCD controller IT9000 series, super precise in Temp control and read-out, also super precise timing countdowns like an clock. The controller also featured with Max. 120mins stand-by function (P-4 mode) make it energy saving and safety.










With superior quality and high performance, this heat press brings you greater productivity in the sublimation.

Electric design is with lower noise compared to heat press machine with air compressor. It is suitable for any sublimation or transferable product no matter which HTV or transfer paper incl. Trim-free laser paper. 5pcs optional quick-change lower platens, no tools required.











▼ Technical Parameters

Model	B2-N		
Voltage	110V/220V		
Heat Plate	40 x 50cm		
Power	1800W-2200W		
Controller	LCD Controller V2		
Max. Temperature	232 °C/ 450 °F		
Temp. Accuracy	±4°F/2°C		
Max. Pressing Force	360kg		
Working Style	Electronic Motor		
Stand-by Feature	Max. 120 mins		
Accept Thickness	≤4.5cm		
Dimensions (L x W x H)	81.5 x 43.5 x 57cm		
Packaging (L x W x H)	86.5 x 54.5 x 72.5cm		
Product Weight	63kg		
Shipping Weight	68kg		
Certificate	CE,UKCA		



Two thermal protection devices connect separately with live wire and Neutral Wire, the third protection is heating plate with temperature protector which prevent abnormal temperature rise.



¬ ● Swing-away & Featured Pull-out Drawer

This EasyTrans Deluxe heat press is Featured with a swing-away function and pull-out drawer enables you have sufficient space to load your garment. Additional magnetic system is applied to the drawer and make sure drawer not sliding back during the threading the T-shirt or not sliding out during press down handle.



This EasyTrans Press is installed with a featured base: 1. Quick changeable system enables you to change the different accessory platen in few seconds. 2. The thread-able base enables you to load or rotate the garment over the lower platen.




¬ ■ Advanced LCD Controller

This heat press is also equipped with advanced LCD controller AT7000 series, super precise in Temp control and read-out. User could set the applying pressure by controller setting (P-4 mode). The controller is also featured with Max. 120mins stand-by function (P-5 mode) make it energy saving and safety.





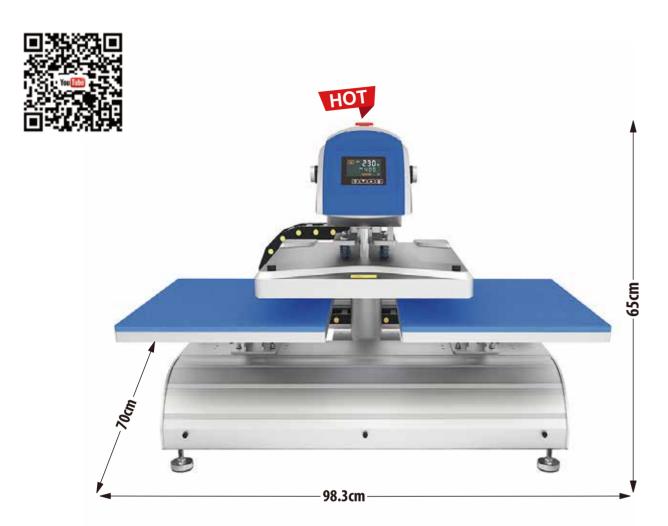

This electronic heat press is the top-of-the-line machine when it comes to mass production at high quality levels.

This unit can handle anything – large or small garments, multiple ceramic tiles, and many other substrates. It does not require compressed air, which makes it more convenient. It features high efficiency & excellent pressure, can operate in full-auto, or semi-auto modes.









▼ Technical Parameters

Model	B2-2N
Voltage	110V/220V
Heat Plate	40 x 50cm
Power	1800W-2200W
Controller	LCD Controller V2
Max. Temperature	232 °C/ 450 °F
Temp. Accuracy	±4°F/2°C
Max. Pressing Force	360kg
Working Style	Electronic Motor
Stand-by Feature	Max. 120 mins
Accept Thickness	≤4.5cm
Dimensions (L x W x H)	94.7 x 72.5 x 71.5cm
Packaging (L x W x H)	110 x 83 x 87cm
Product Weight	125kg
Shipping Weight	140kg
Certificate	CE,UKCA



Triple Thermal Production

Two thermal protection devices connect separately with live wire and Neutral Wire, the third protection is heating plate with temperature protector which prevent abnormal temperature rise.



Twin Station Efficient

This EasyTrans Deluxe level heat press has twin lower plates, you could shuttle the upper plate from the left and right, which makes the heat transfer work more safety and get rid of the heat zone, also makes the transfer job more efficient.



■ Thread-able & Interchangeable Base

This EasyTrans Press is installed with a featured base: 1. Quick changeable system enables you to change the different accessory platen in few seconds. 2. The thread-able base enables you to load or rotate the garment over the lower platen.




Advanced LCD Controller

This heat press is also equipped with advanced LCD controller AT7000 series, super precise in Temp control and read-out. User could set the applying pressure by controller setting (P-4 mode). The controller is also featured with Max. 120mins stand-by function (P-5 mode) make it energy saving and safety.





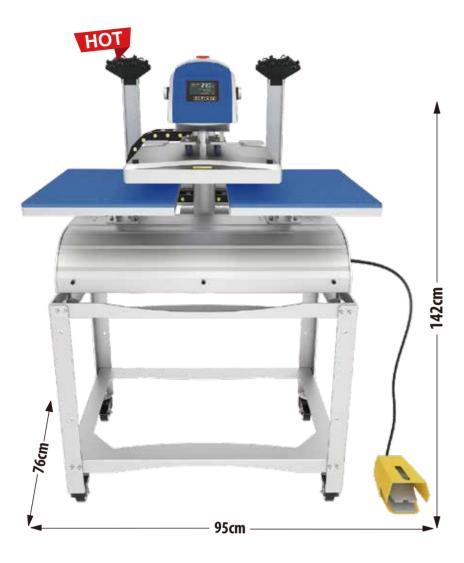

Being powered by electric gear technology with 350 – 500kg heat pressing for heavy pressure application, which is world class level. With two heat printing stations, the 40 x 50cm Dual Manual Electric Pro Two Heat Press (SKU#: B2-2N Pro Max) increases efficiency by allowing threading and layout on one station while the other is working. It's perfect for high-volume operations. It also offers heat-free workspace, touch screen settings, live digital time, temperature, and pressure readouts. Plus, with lower plates thread-ability, you can position a garment once, rotate and decorate any area.









▼ Technical Parameters

Model	B2-2N PRO MAX			
Voltage	110V/220V			
Heat Plate	40 x 50cm			
Power	1800W-2200W			
Controller	LCD Controller V2			
Max. Temperature	232 °C/ 450 °F			
Temp. Accuracy	±4°F/2°C			
Max. Pressing Force	360kg			
Working Style	Electronic Motor			
Stand-by Feature	Max. 120 mins			
Accept Thickness	≤4.5cm			
Dimensions (L x W x H)	94.7 x 82 x 71.7cm			
Packaging (L x W x H)	110 x 83 x 87cm			
Product Weight	125kg			
Shipping Weight	140kg			
Certificate	CE,UKCA			



Triple Thermal Production

Two thermal protection devices connect separately with live wire and Neutral Wire, the third protection is heating plate with temperature protector which prevent abnormal temperature rise.



¬ ■ Twin Station Efficient

This EasyTrans Deluxe level heat press has twin lower plates and could be semi-auto or fully automatic in a single switch. This electric heat pres is featured with a HMI/ PLC gauge, so user could control its shuttle moving speed, also able to have a trouble shooting when it's necessary.



■ Thread-able & Interchangeable Base

This EasyTrans Press is installed with a featured base: 1. Quick changeable system enables you to change the different accessory platen in few seconds. 2. The thread-able base enables you to load or rotate the garment over the lower platen.



■ Advanced LCD Controller

This heat press is also equipped with advanced LCD controller AT7000 series, super precise in Temp control and read-out. User could set the applying pressure by controller setting (P-4 mode). The controller is also featured with Max. 120mins stand-by function (P-5 mode) make it energy saving and safety.







Which Heat Press is The Best One for my Transfer Business?

lmage					D.
Model NO.	HP3804D-F	HP3804D-3	HP3805N	B1-N	B2-N
Working Style	Lever Mechanism & Magnetic	Lever Mechanism & Magnetic	Lever Mechanism	Air Piston	Electronic Motor
Plate Size			40 x 50cm		
Controller Type	LCD Controller	LCD Conttroller	LCD Controller	LCD Conttroller	LCD Controller V2
Max. Accept Thickness	≤lcm	≤lcm	lcm	5.5cm	4.5cm
Max. Pressing Force	360kg	360kg	350kg	450kg	360kg
Max. Temperature			232°C / 450°F		
Max. Timing			999s		
Auto Shut-off		Max. 120min (P.S. Add	ditonal overheat protec	ctor is also installed.)	
		Structure	Features		
Platen Qty.	1	1	1	1	1
Swing Shuttle			✓	✓	✓
Slide-out Base	√	√	√	√	√
Auto-open	√	√		√	√
Interchangeable	√	√	√	√	✓
Threadable	√	√	√	√	✓
		Accepted Trai	nsfer Materials		
DTF	√	√	√	√	√
DTG	√	√	√	√	√
Curing	√	√	√	√	√
HTV	√	√	√	√	√
Trim-Free Paper	√	√	√	√	√
Sublimation	√	√	✓	√	√

Image					
Model NO.	HP3805-2N	B1-2N	B2-2N	B2-2N PRO MAX	B2-2N PMS+HPC-3L
Working Style	Lever Mechanism	Air Piston	Electronic Motor	Electronic Motor	Electronic Motor
Plate Size			40 x 50cm		
Controller Type	LCD Conttroller	LCD Conttroller	LCD Controller V2	LCD Controller V2	LCD Controller V2
Max. Accept Thickness	lcm	5.5cm	4.5cm	≤4.5cm	≤4.5cm
Max. Pressing Force	350kg	450kg	360kg	360kg	360kg
Max. Temperature			232°C / 450°F		
Max. Timing			999s		
Auto Shut-off		Max. 120min (P.S. Add	ditonal overheat protec	ctor is also installed.)	
		Structure	Features		
Platen Qty.	2	2	2	2	2
Swing Shuttle	√	√	√	✓	√
Slide-out Base					
Auto-open		√	√	√	√
Interchangeable	✓	√	√	√	√
Threadable	√	√	√	√	√
		Accepted Trai	nsfer Materials		
DTF	√	√	√	√	✓
DTG	√	√	√	√	✓
Curing	√		√	√	√
HTV	✓	√	√	√	√
Trim-Free Paper	✓	√	√	√	√
Sublimation	√	√	√	√	✓



EasyTrans Premium Level





The magnetic auto-open HP680 is a multipurpose large format manual heat transfer press intended for the imprinting of a vast range of different materials. The machine combines an oversized platen with a low production oriented framework with a single loading table configuration. It is available in two different heater block sizes: 60 x 80cm and 80 x 100cm. The gas shock counter springs provide a weightless and effortless operation of the press. The state-of-the-art control system accurately regulates all aspects of the electrical functions of the press, freeing the operator for the main goal of material imprinting.





Similar Model

HP680-Z





▼ Technical Parameters

Model	HP680		
Voltage	220V/ 380V		
Heat Plate	60 x 80cm, 80 x 100cm		
Power	4-8kW		
Controller	LCD Controller		
Max. Temperature	232 °C/ 450 °F		
Temp. Accuracy	±10 °F/5 °C		
Max. Pressing Force	350kg		
Working Style	Lever Mechanism		
Stand-by Feature	Max. 120 mins		
Accept Thickness	≤1.5cm		
Dimensions (L x W x H)	102 x 83 x 57cm (60 x 80cm)		
Packaging (L x W x H)	115 x 95 x 70cm (60 x 80cm)		
Product Weight	96kg		
Shipping Weight	138kg		
Certificate	CE,UKCA		



¬ Semi auto-open Gently

This heat press is over-center-pressure adjustment model, also it carries a magnetic auto-release function, means the heat press will be releasing the heat platen automatically when timing is finished which save labor and works more efficient.



Advanced LCD Controller

This heat press is also equipped with advanced LCD controller IT9000 series, super precise in Temp control and read-out, also super precise timing countdowns like an clock. The controller also featured with Max. 120mins stand-by function (P-4 mode) make it energy saving and safety.



Pull-out Drawer, Caddie Stand

This EasyTrans Industrial Mate is entry-level heat press, which is installed with a smooth pull-out drawer enables you have sufficient heat-free zone and load your garment easily. Besides, it's available in either as a tabletop or with caddie stand model.





→ Featured Processing Standard Heat transfer presses are produced by ISO9001

CE RoHS

qualified team, UL/CE certified spare parts and advanced mold or facilities are applied to make sure the premium quality both in electronic & mechanism stability and heat transfer projects in good quality.

4] 42



EasyTrans Premium Level





The heat press is an air-operated large format heat transfer press with 75 x 105cm and 80 x 100cm size. The B5 provides production-oriented pressing with push button operation, fully digital temperature & time control, and solid steel welded frame design with an affordable automatic large format price. The B5 utilizes the same LCD control system, heating elements, and pressure capability as the Industrial Mate series, and operates with a smooth drawer-style front-loading motion & high pressure top-down pneumatic with fully adjustable PSI control. Capable of perfectly pressing fabric, complex garments, metal, wood, ceramics.









▼ Technical Parameters

Model	B5		
Voltage	220V/ 380V		
Heat Plate	80 x 100cm, 75 x 105cm		
Power	6-8kW		
Controller	LCD Controller		
Max. Temperature	232 °C/ 450 °F		
Temp. Accuracy	±10 °F /5 °C		
Max. Pressing Force	1 Ton		
Working Style	Air Piston		
Stand-by Feature	Max. 120 mins		
Accept Thickness	≤6cm		
Dimensions (L x W x H)	1		
Packaging (L x W x H)	135 x 113 x 108cm		
Product Weight	300kg		
Shipping Weight	320kg		
Certificate	CE,UKCA		



Pneumatic, Hand Free Operation

Long lasting air cylinder lift system, hand free operation. If you have any laser transfer paper or other heat transfer materials need higher pressure, this model is your ideal heat press which generates max.150Psi.



Advanced LCD Controller

This heat press is also equipped with advanced LCD controller IT9000 series, super precise in Temp control and read-out, also super precise timing countdowns like an clock. The controller also featured with Max. 120mins stand-by function (P-4 mode) make it energy saving and safety.



Pull-out Drawer Motion

This EasyTrans Industrial Mate is entry-level heat press, which is installed with a smooth pull-out drawer enables you have sufficient heat-free zone and load your garment easily.





E

Featured Processing Standard


Heat transfer presses are produced by ISO9001 qualified team, UL/CE certified spare parts and advanced mold or facilities are applied to make sure the premium quality both in electronic & mechanism stability and heat transfer projects in good quality.

.3







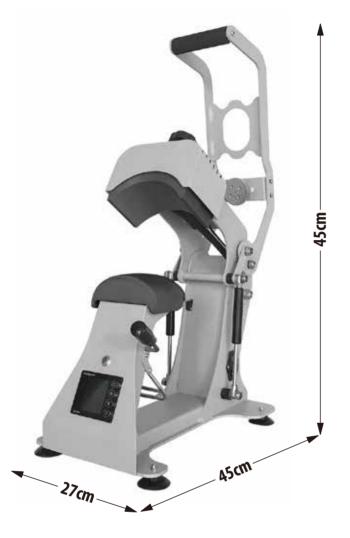



Functioning as a magnetic auto-open cap press, with molded cap silicon, this cap press enables you to print the front, back and sides of a cap easily. Progressive designed molded cap siliconhelps to reduce creasing and scorching. It also offers heat-free workspace, touch screen settings, live digital time, temperature readouts.









▼ Technical Parameters

Model	CP2815-2			
Voltage	110V/220V			
Heat Plate	9.5 x 18cm			
Power	600W			
Controller	LCD Controller			
Max. Temperature	232 °C/ 450 °F			
Temp. Accuracy	±4°F/2°C			
Max. Pressing Force	250kg			
Working Style	Lever Mechanism & Magnetic			
Stand-by Feature	Max. 120 mins			
Accept Thickness	≤1cm			
Dimensions (L x W x H)	45 x 27 x 45cm			
Packaging (L x W x H)	59 x 33 x 53cm			
Product Weight	20kg			
Shipping Weight	26kg			
Certificate	CE,UKCA			



☐ Semi-auto & OTC Pressure

Locks down easily with magnetic assist, causing less fatigue on wrists and shoulders.

This one provides Over-The-Centre (OTC) pressure and high watt density to ensure consistently even print results.



Advanced LCD Controller

This heat press is also equipped with advanced LCD controller IT900 series, super precise in Temp control and read-out, also super precise timing countdowns like an clock. The controller also featured with Max. 120mins stand-by function (P-4 mode) make it energy saving and safety.



☐ Sturdy Fixed Hook

With the new design for this hook, the cap can be fixed very well and easy for customers to operate once the press start or finish. Make each of the caps extending well.





Featured Processing Standard

RoHS

Heat transfer presses are produced by ISO9001 qualified team, UL/CE certified spare parts and advanced mold or facilities are applied to make sure the premium quality both in electronic & mechanism stability and heat transfer projects in good quality.









The ultimate semi-auto cap heat press is engineered to solve your major cap printing problems. It also has the following features. Molded platen to reduce creasing and scorching, One-size-fits-all platen – transition between cap sizes in one platen, Independently controlled upper and lower heated platens, Heated lower platen makes it easy for patches and emblems, One-hand operation for easy printing, Wide opening offers a heat-free workspace, Opens automatically, reducing risk of over-application, Precise temperature and multi-timer display, Must have dedicated circuit breaker.











Model	CP2815-3
Voltage	110V/220V
Heat Plate	9.5 x 18cm
Power	600W
Controller	LCD Controller
Max. Temperature	210°C / 410°F
Temp. Accuracy	±4°F/2°C
Max. Pressing Force	250kg
Working Style	Lever Mechanism & Magnetic
Stand-by Feature	Max. 120 mins
Accept Thickness	≤1cm
Dimensions (L x W x H)	49.7 x 48.5 x 30.8cm
Packaging (L x W x H)	60.5 x 58.5 x 38.8cm
Product Weight	26kg
Shipping Weight	33kg
Certificate	CE,UKCA



Widely Operation Angle

A wide semi auto-opening mode offers one-hand operation for easy printing and also reduces the risk of over-application.



□ • Bigger Printable Range

One-size-fits-all platen - the transition between cap sizes without having to change platens, which let you print the front, back and sides of cap easier.



Double Heated Design

Not only the top heated, the bottom heated is also designed into this new machine. Bottom-heat printing is crucial for some types of premium, dimensional hat graphics including patches, lather and emblems, etc.



Advanced LCD Controller

Smart controller provide precise temperature control, multi-timer to meet different application, auto stand-by mode to save energy during free period.







The tumbler press machine is easy to use and store, it's portable and just need small work space. It's famous for all-in-one feature, it can sublimation print 11 oz or 15 oz sublimation ceramic mugs 2 pieces in one time, and it's can print the straight wall or cone wall sublimation tumbler in various sizes. Perfect for transferring ceramic cups, mason jars, stainless bottles, and other kinds of tumblers. A Creative Presents for Christmas, Halloween, Thanksgiving, or Birthday!









▼ Technical Parameters

Woltage 110V/220V Heat Plate 270 x 212cm Power 600W Controller Digital Controller Max. Temperature 232 °C/ 450 °F Temp. Accuracy 44 °F / 2 °C Max. Pressing Force 120kg Working Style Lever Mechanism Stand-by Feature Max. 120 mins Accept Thickness Dimensions (L x W x H) Packaging (L x W x H) Product Weight Shipping Weight 7.5kg Certificate CE,UKCA		
Power Controller Digital Controller Max. Temperature 232 °C/ 450 °F Temp. Accuracy Max. Pressing Force 120kg Working Style Lever Mechanism Stand-by Feature Accept Thickness Dimensions (L x W x H) Packaging (L x W x H) Product Weight 7.5kg	Model	MP5105
Power Controller Digital Controller Max. Temperature 232 °C/450 °F Temp. Accuracy ±4 °F/2 °C Max. Pressing Force 120kg Working Style Lever Mechanism Stand-by Feature Max. 120 mins Accept Thickness 1cm Dimensions (L x W x H) Packaging (L x W x H) Product Weight 6.5kg Shipping Weight	Voltage	110V/220V
Controller Max. Temperature 232 °C/450 °F Temp. Accuracy ±4 °F/2 °C Max. Pressing Force 120kg Working Style Lever Mechanism Stand-by Feature Max. 120 mins Accept Thickness Dimensions (L x W x H) Packaging (L x W x H) Product Weight Shipping Weight Digital Controller 232 °C/450 °F	Heat Plate	270 x 212cm
Max. Temperature232 °C/ 450 °FTemp. Accuracy±4 °F/2 °CMax. Pressing Force120kgWorking StyleLever MechanismStand-by FeatureMax. 120 minsAccept Thickness1cmDimensions (L x W x H)37 x 31 x 17cmPackaging (L x W x H)41 x 35 x 22cmProduct Weight6.5kgShipping Weight7.5kg	Power	600W
Temp. Accuracy ±4 °F / 2 °C Max. Pressing Force 120kg Working Style Lever Mechanism Stand-by Feature Max. 120 mins Accept Thickness 1cm Dimensions (L x W x H) 37 x 31 x 17cm Packaging (L x W x H) 41 x 35 x 22cm Product Weight 6.5kg Shipping Weight 7.5kg	Controller	Digital Controller
Max. Pressing Force Working Style Lever Mechanism Max. 120 mins Accept Thickness 1cm Dimensions (L x W x H) Packaging (L x W x H) Product Weight Shipping Weight 120kg Lever Mechanism Max. 120 mins 1cm 41x 35 x 31 x 17cm 41x 35 x 22cm 6.5kg	Max. Temperature	232 °C/ 450 °F
Working Style Stand-by Feature Max. 120 mins Accept Thickness 1cm Dimensions (L x W x H) Packaging (L x W x H) Product Weight Shipping Weight Lever Mechanism Max. 120 mins 1cm 37 x 31 x 17cm 41 x 35 x 22cm 6.5kg	Temp. Accuracy	±4°F/2°C
Stand-by Feature Accept Thickness 1cm Dimensions (L x W x H) Packaging (L x W x H) Product Weight Shipping Weight Max. 120 mins 1cm 37 x 31 x 17cm 41 x 35 x 22cm 6.5kg	Max. Pressing Force	120kg
Accept Thickness Dimensions (L x W x H) Packaging (L x W x H) Product Weight Shipping Weight 1cm 37 x 31 x 17cm 41 x 35 x 22cm 6.5kg 7.5kg	Working Style	Lever Mechanism
Dimensions (L x W x H) Packaging (L x W x H) Product Weight Shipping Weight 37 x 31 x 17cm 41 x 35 x 22cm 6.5kg 7.5kg	Stand-by Feature	Max. 120 mins
Packaging (L x W x H) Product Weight 6.5kg Shipping Weight 7.5kg	Accept Thickness	1cm
Product Weight 6.5kg Shipping Weight 7.5kg	Dimensions (L x W x H)	37 x 31 x 17cm
Shipping Weight 7.5kg	Packaging (L x W x H)	41 x 35 x 22cm
	Product Weight	6.5kg
Certificate CE,UKCA	Shipping Weight	7.5kg
	Certificate	CE,UKCA



→ Well Constructed Frame

This sublimation machine consists of high-quality metal materials and silica-gel pads, delivering an outstanding thermal capacity. Besides, a stable structure ensures a secure operating process.



Beep Function

Our machine will automatically beep at the end of the timer countdown or reach the set temperature, reminding users to take the mugs out. Reduce the chance of accidents.



Even Sublimate Pressure

Adjustable pressure knobs and soft silicone heating pads provide a full range of heating effect. It ensures that the mats tightly fit the materials. Especially suitable for cylindrical cups.



Multiple Uses

This compact tumbler heat presser can transfer colorful pictures onto ceramics mugs, coffee cups, and refined glasses. It is suitable for small businesses and personal uses.











Craft Mug Press – One Touch (Sku NO. MP170) is so far the best craft mug press and electric style. Give the gift of vibrant, professional–quality, personalized mugs with Craft Mug Pres,No manual temperature or pressure setting needed,Personalize a decorative mug by simple one touch,11–15oz straight wall mug in diameter 80–85mm,10 mins auto-off protection when machine is not in use.









▼ Technical Parameters

Model	MP170
Voltage	110V/220V
Heat Platen Size	Suitable for 10oz,11oz and 15oz
Power	300W
Controller	Smart Controller without Screen
Max. Temperature	180°C/356°F
Temp. Accuracy	±4°F/2°C
Max. Pressing Force	120kg
Working Style	Lever Mechanism
Stand-by Feature	Max. 120 mins
Accept Thickness	1cm
Dimensions (L x W x H)	21.0 x 33.5 x 22.5cm
Packaging (L x W x H)	36.0 x 22.0 x 26.0cm
Product Weight	5kg
Shipping Weight	6kg
Certificate	CE,UKCA



Put The Mug In The Machine

Hold your mug by the handle and put it into the press. Please note that when using the transfer sheets butcher paper is not needed around the mug.



Press Forward Button To Press Mug

Motor start (push rod forward); When the push rod is in place, the timing starts at the same time. The external time indicator shows O O O, and each of the 4 indicators is 1 minute (the indicator is green).



Requirements for Mug

For use with compatible sublimation mug blanks, polymer-coated, 10-16 oz (296 -470 ml) straight wall only; 82-86 mm diameter mugs +/-1 mm (3.2-3.4 in).



→ Finishing Your Mug

Raise the lever to release your mug. Then hold the handle of the mug because it will get cold, and then remove it from the press. If it makes you feel more comfortable, you can also use heat-resistant gloves. Let your cup cool for a few minutes before processing.





Heat Press Movable Caddie

Model #: HPC

Dimension: 82 x 79 x 83.8+10cm Packaging: 92 x 92 x 25cm

G.W.: 50kg

Highlights

- Reinforced & sturdy made
- Compacts your heat press
- 360° rotation accessible

Heat Press Moveable Table

Model #: ZWJ

Dimension: 80 x 74 x 54cm Packaging: 84 x 30 x 60cm

G.W.: 25kg

Highlights

- Reinforced & sturdy made
- Compacts your heat press
- 360° rotation accessible
- Max. 300Kg Bearing Load


Quick change optional Platens

Highlights

- 11 kinds of Quick change platens
- Variety sizes & custom accepted
- Advanced or deluxe levels
- Make every transfer properly







Heat Press Movable Caddie

Model#:HPC-3L

Dimension:101 x 62 x (38-90)cm

Package:107 x 68 x 44cm

G.W.:85KG

Highlights

- Reinforced & sturdy made
- Compacts your heat press
- 360° rotation accessible
- Max. 300Kg Bearing Load



Model #: CLA Definition: HD

Packaging: 69 x 26 x 26.4cm

G.W.: 3.5kg

Lower Platen Protector Wraps

Model #: LPW

Size: from 13x13cm to 40x60cm

Materials: Teflon Cloth + Nylon Cloth

High Temperature Pillows

Model #: HTP

Size: from 13x13cm to 40x60cm Materials: Special Cotton



